


TECHNICAL SPECIFICATIONS

POWER	220 Volt AC (110 Volt AC on request)	
FREQUENCY	50Hz / 60Hz	
POWER CONSUMPTION	300W per lane	
POWER FAILURE OPERATION	The glass wings can be easily moved into the cabinet to allow free access	
FIRE ALARM OPERATION	Trigger can activate barriers to remain in the open position for free access	
SYSTEMS INTEGRATION	Integrates with all access control and time & attendance systems	
OPERATING CYCLE TIME	Open	1 second
	Close	
TAMPER ALARM	<ul style="list-style-type: none"> • Electronic output for a building security alert, e.g. to lock doors or activate CCTV • LED lights show red cross • Internal buzzer sounds 	
STANDARD OPERATIONAL MODES	<ul style="list-style-type: none"> • Entry and exit • Entry only • Exit only • Optical mode for entry and exit <p>All modes can be changed using a selector switch supplied with with the Speedstile Express</p>	



SPEEDSTILE EXPRESS RANGE

SPEEDSTILE EXPRESS SINGLE LANE

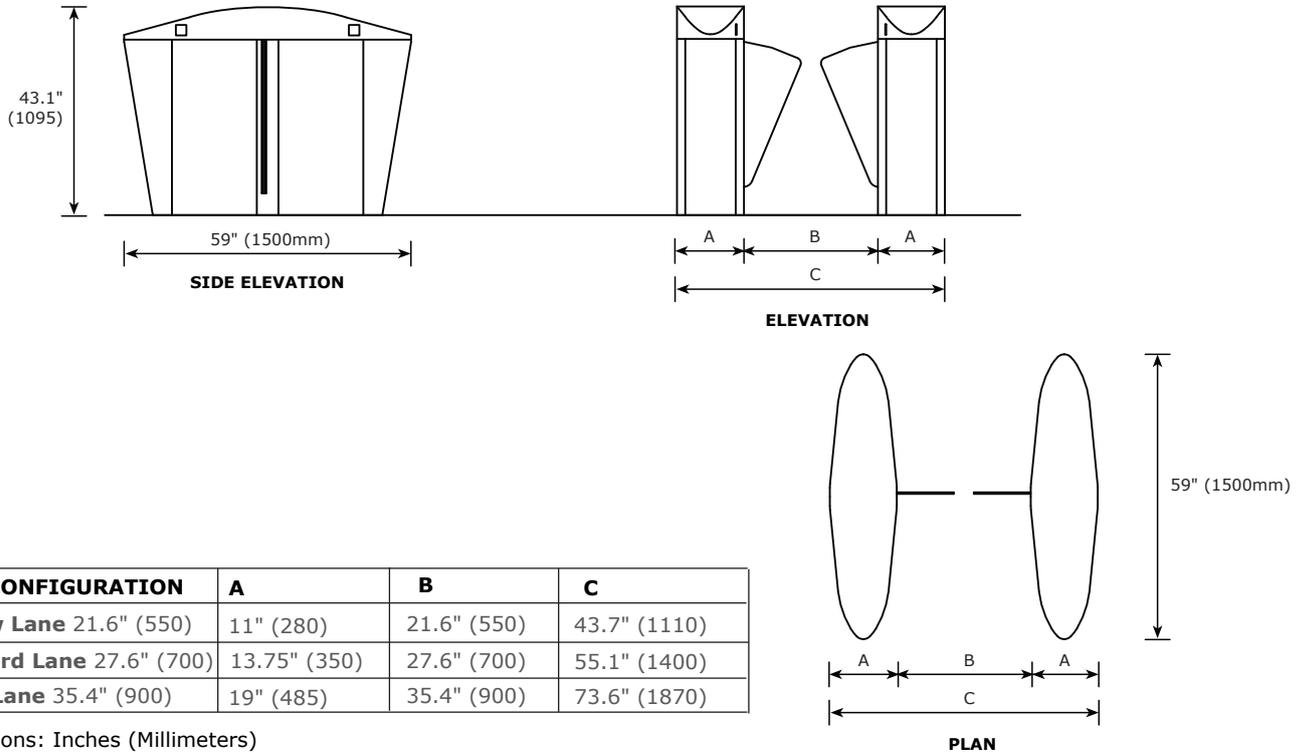

SPEEDSTILE EXPRESS DOUBLE LANE

